

MACSEAL 6690-2

HOT APPLIED JOINT & CRACK SEALANT, ASTM 6690 TYPE II & III OR EQUIVALENT

PRODUCT DESCRIPTION

MACSEAL 6690-2 is a premium quality, high performance, hot applied, single component joint and crack sealant.

MACSEAL 6690-2 is a formulated blend of engineered asphalts, virgin polymers, synthetic rubbers, reinforcing fillers, anti-oxidants and UV inhibitors.

MACSEAL 6690-2's unique formulation offers excellent low temperature bonding properties, prolonged resistance to degradation from weather, and a positive seal during the expansion and contraction of the joint or crack. It remains ductile and highly resilient at low and high service temperatures.

GENERAL PRODUCT FEATURES

- Cures to a non-tacky finish
- Can be applied over a wide range of temperatures
- Engineered for cold climates
- Its flexible nature allows for quick relaxation during the build-up of thermal stresses in asphalt pavements, translating in enhanced field performance
- Easy to apply via gravity type mechanism (e.g. pour pot, walk behind units etc.) as well as via pump and hose/wand method
- Adheres very well to both hot mix asphalt and Portland cement concrete
- Engineered specifically for double boiler/oil jacketed kettles. Not recommended for direct fire melters
- Prevents the intrusion of water and incompressibles into the cracks of asphaltic and Portland cement concrete pavements


RECOMMENDED USE

MACSEAL 6690-2 is recommended for the large scale sealing of joints and random cracks in portland cement concrete and asphalt pavements. It will provide good protection against repeated freeze thaw cycles.

SPECIFICATIONS AND TYPICAL RESULTS

TEST	TYPICAL DATA	SPEC RANGE	
		Min	Max
Flash Point (COC), °C	255
Cone Penetration, 25°C, dmm	75	...	90
Flow, 60°C, mm	0	...	3
Softening Point R&B, °C	88	80	...
Bond, 50% ext, -29°C, 3 cycles	Pass 3	3 sp	...
Resilience, 25°C, %	69	60	...
Asphalt Compatibility	Pass	Pass	...

TEMPERATURE – VISCOSITY CURVE

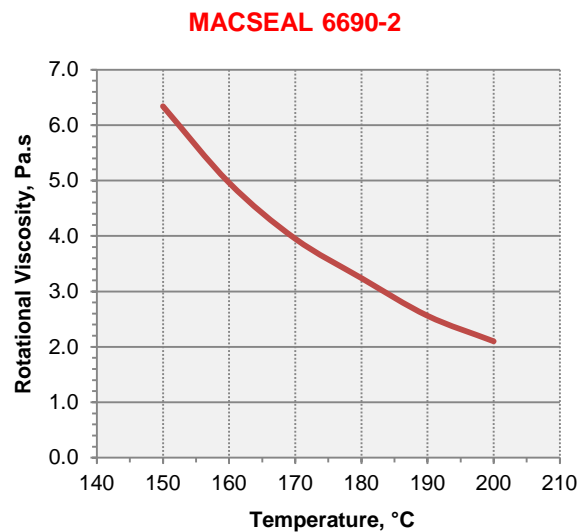

MACSEAL 6690-2

HOT APPLIED JOINT & CRACK SEALANT, ASTM 6690 TYPE II & III OR EQUIVALENT

APPLICATION GUIDELINES

For detailed **MACSEAL 6690-2** joint and crack preparation or specific application instructions refer to specifying agency publications or contact your **MCA Marketing** Representative.

APPLICABLE SPECIFICATIONS

MACSEAL 6690-2 meets or exceeds: ASTM D-6690 Type II formerly ASTM D-3405, AASHTO M 324-04, Federal Specification SS-S-1401-C, FAA Specification P-605 Type III, CORPS of Engineers CRD-C530, various State and Provincial D.O.T. specifications.

APPLICATION TEMPERATURES

- Recommended Pouring Temperature 185°C (365°F)
- Maximum Safe Heating Temperature 200°C (392°F)

MELTING EQUIPMENT

MACSEAL 6690-2 must be melted in a double boiler, oil-jacketed kettle, equipped with mechanical agitator and separate temperature thermometers for both the oil bath and melting vat.

COVERAGE

MACSEAL 6690-2 weighs approximately 10 lb/gal (1.20 kg/L). A joint ½ x ½ " (12.7 mm x 12.7 mm) requires approximately 13 lb per 100 lineal feet or 19.4 kg per 100 lineal meters.



PACKAGING, STORAGE AND HANDLING

MACSEAL 6690-2 is available in the following packaging:

- 485 lb (220 kg), open top drums containing 10 individual pucks of roughly 48.5 lb.
- 2 x 25 lb polybags in a high strength corrugated cardboard container

MACSEAL 6690-2 in drums can be stored inside or exposed to the elements, however **MACSEAL 6690-2** in boxes should be kept in a dry environment.

CERTIFICATION OF QUALITY

McAsphalt Industries Limited is accredited to the quality standard **ISO 9001** and to the environmental standard **ISO 14001**.

Each lot of **MACSEAL 6690-2** is produced using the strictest quality, safety and environmental guidelines. Each production lot is tested to ensure it meets or exceeds all performance requirements, and it is delivered with a Certificate of Analysis.

PRODUCT SUPPORT

With the **MCA Advantage**, you get a partner and advisor who will consult with you about designs, specifications, technical services, processes and material selection. By developing innovative, custom-designed products that offer additional benefits, such as peak performance in unique conditions, improved field performance, greater environmental and health benefits, the **MCA Advantage** provides significant long-term cost savings, resulting in lower "total cost of ownership."



McASPHALT INDUSTRIES LIMITED

8800 Sheppard Ave East T 416.281.8181 TF 1.800.268.4238
 Toronto, ON M1B 5R4 F 416.281.8842 E info@mcasphalt.com

mcasphalt.com
 ISO 9001/14001/45001